


CA and CH SERIES

Cased/Uncased, Upflow/Downflow
Horizontal "A" Indoor Coils



Painted Cased

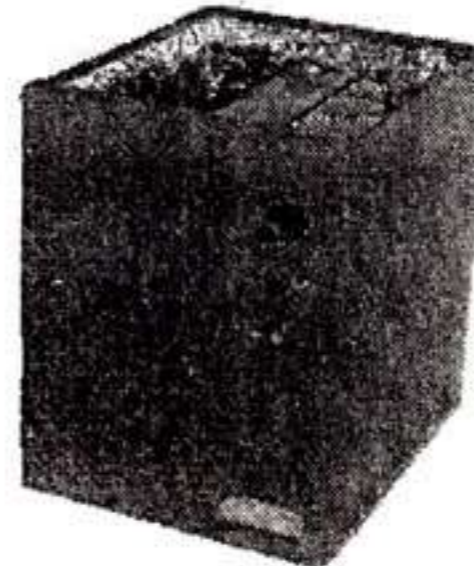

Horizontal "A" Coil



Uncased



Standard Features

- No rust high temperature thermoplastic drain pans feature a low water retention design
- Available with check flowrate expansion device or check thermal expansion valve for heat pump or cooling only applications
- Rifled copper tubing and wave pattern aluminum fin coils

Cased Coil Cabinet Construction

- Foil-faced insulation
- Galvanized leather-grain finish and high-quality post-paint models are available
- Split-seam front—excellent access

NOTE: DO NOT USE THIS COIL ON OIL FURNACES OR ANY APPLICATIONS WHERE THE TEMPERATURE ON THE DRAIN PAN MAY EXCEED 300 °F. A FIELD-FABRICATED METAL DRAIN PAN SHOULD BE USED IN THIS APPLICATION. The usage of these coils/drain pans must be strictly adhered to in order to avoid any possibility of using a low-temperature material in a high-temperature application.



PRODUCT SPECIFICATIONS

Cased Upflow/Downflow Indoor Coils (CACF/CAPF/CAPX)

Model			Dimensions			Specifications						
Unpainted Flowrater	Painted Flowrater	Painted TXV	A	B	C	Nominal Tons	Nominal CFM	Static Pressure Wet Coil	No. of Rows	Liquid Conn.	Suction Conn.	Shipping Weight (pounds)
CACF018A2A			14"	18"	13"	1.5	650	.20	2	3/8"	5/8"	31
CACF024A2A			14"	18"	13"	2.0	900	.20	2	3/8"	3/4"	33
CACF030A2A			14"	18"	13"	2.5	1,000	.30	3	3/8"	3/4"	38
CACF036A2A			14"	22"	13"	3.0	1,200	.30	3	3/8"	3/4"	38
	CAPF018B2A		17.5"	18"	16.5"	1.5	650	.20	2	3/8"	5/8"	33
		CAPX018B2A	17.5"	22"	16.5"	1.5	650	.20	2	3/8"	5/8"	33
	CAPF025B2A		17.5"	18"	16.5"	2.0	900	.20	3	3/8"	3/4"	35
		CAPX025B2A	17.5"	22"	16.5"	2.0	900	.20	3	3/8"	3/4"	35
CACF030B2A	CAPF030B2A		17.5"	18"	16.5"	2.5	1,000	.30	3	3/8"	3/4"	42
		CAPX030B2A	17.5"	22"	16.5"	2.5	1,000	.30	3	3/8"	3/4"	42
CACF036B2A	CAPF036B2A	CAPX036B2A	17.5"	22"	16.5"	3.0	1,200	.30	3	3/8"	3/4"	48
CACF042B2A	CAPF042B2A	CAPX042B2A	17.5"	22"	16.5"	3.5	1,400	.30	3	3/8"	3/4"	60
CACF048B2A			17.5"	26"	16.5"	4.0	1,600	.30	3	3/8"	7/8"	55
	CAPF036C2A		21"	26"	20"	3.0	1,200	.30	3	3/8"	3/4"	55
CACF042C2A	CAPF042C2A		21"	26"	20"	3.5	1,400	.30	3	3/8"	3/4"	65
CACF048C2A			21"	26"	20"	4.0	1,600	.30	3	3/8"	7/8"	57
	CAPF049C2A	CAPX049C2A	21"	26"	20"	4.0	1,600	.30	3	3/8"	7/8"	57
CACF060C2A			21"	30"	20"	5.0	2,000	.30	3	3/8"	7/8"	61
CACF061C2A			21"	30"	20"	5.0	2,000	.30	4	3/8"	7/8"	68
	CAPF049D2A	CAPX049D2A	24.5"	26"	23.5"	4.0	1,600	.30	3	3/8"	7/8"	58
CACF060D2A	CAPF060D2A	CAPX060D2A	24.5"	30"	23.5"		2,000	.30	3	3/8"	7/8"	68
CACF061D2A		CAPX061D2A	24.5"	30"	23.5"		2,000	.30	4	3/8"	7/8"	75

